



Table with 3 columns: Item, Specification, and Value. Rows include Model ID (NPM-D3A), PCB dimensions, PCB exchange time, Electric source, Pneumatic source, Dimensions, and Mass.

Table with 5 columns: Placement head, High production mode[ON], High production mode[OFF], Lightweight 8-nozzle head, and 2-nozzle head. Rows include Max. speed, Placement accuracy, Component dimensions, and Component supply (Taping, Stick, Tray).

*Placement tact time, inspection time and accuracy values may differ slightly depending on conditions.
*Please refer to the specification booklet for details.
*1: Due to a difference in PCB transfer reference...
*2: Only for main body
*3: Dimension D including tray feeder: 2 683 mm; Dimension D including feeder cart: 2 728 mm
*4: Excluding the monitor, signal tower and ceiling fan cover.
*5: Lightweight 16NH V2 is also installable.
*6: ±25 μm placement support option.
*7: The 03015/0402 mm chip requires a specific nozzle/feeder.
*8: Support for 03015 mm chip placement is optional.

Safety Cautions
●Please read the User's Manual carefully to familiarize yourself with safe and effective usage procedures.
●To ensure safety when using this equipment, all work should be performed according to that as stated in the supplied Operating Instructions. Read your operating instruction manual thoroughly.

Panasonic Group products are built with the environment in mind.
Please check the homepage for the details.
panasonic.com/global/corporate/sustainability

Inquiries...

Panasonic Corporation
Process Automation Business Division
3-1-1 Inazu-cho, Toyonaka City, Osaka 561-0854, Japan
TEL +81-6-6866-8675
FAX +81-6-6862-0422


All data as of January 1, 2021
Ver. January 1, 2021
© Panasonic Corporation 2021



●Changes in specifications and appearance may be made without notice for product improvement.
●Homepage industrial.panasonic.com/ww/fa-jisso

NPM
NEXT PRODUCTION MODULAR
Manufacturing Process Innovation
Model ID NPM-D3A
Model No. NM-EJM6E
LNB conveyor + 3 production modulars in-line setup
CE
*It may not conform to Machinery Directive and EMC Directive in case of optional configuration and custom-made specification.

- 1 High area productivity with total mounting lines**
Higher productivity and quality with printing, placement and inspection process integration
- 2 Configurable modules allow flexible line setup**
Head location flexibility with plug-and-play functions
- 3 Comprehensive control of lines, floor and factory with system software**
Production plan support through line operation monitoring

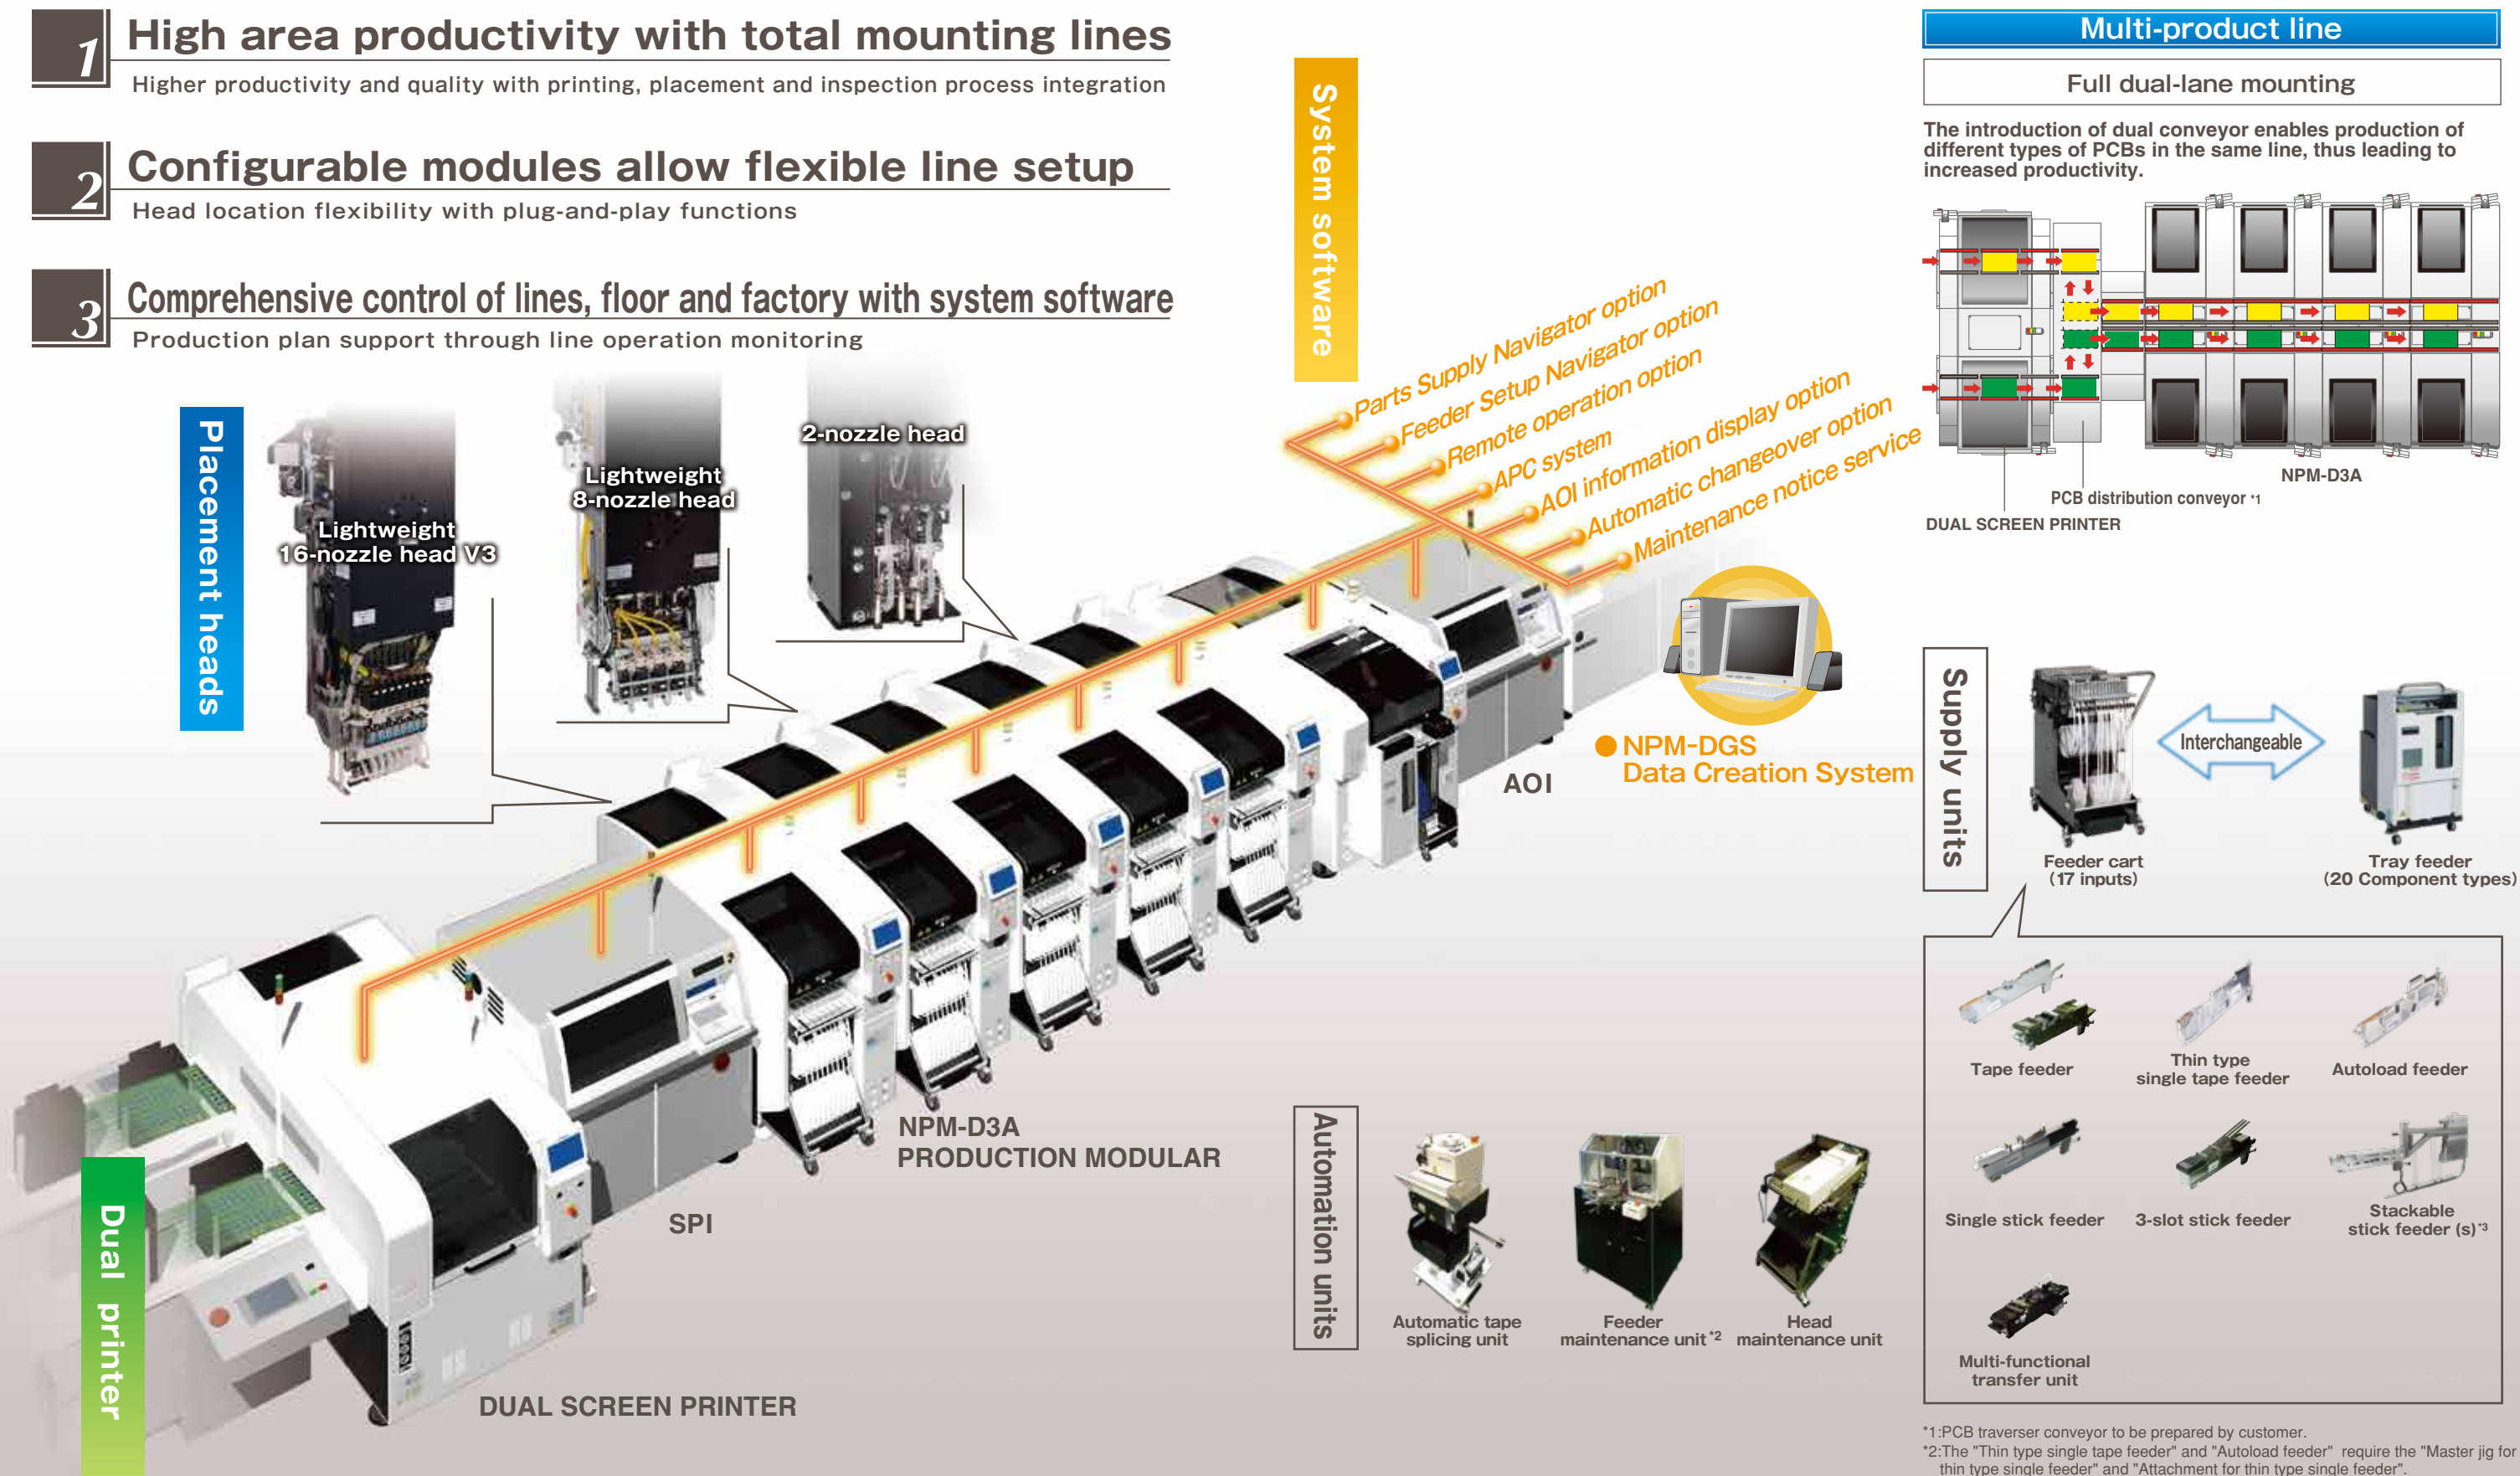


*1:PCB traverser conveyor to be prepared by customer.
 *2:The "Thin type single tape feeder" and "Autoload feeder" require the "Master jig for thin type single feeder" and "Attachment for thin type single feeder".
 *3:L-sized one is available separately, depending on the component size.

Features

The introduction of light-weight 16NH V3 further advances the performance of the machine.

- ◆ **High production mode** (High production mode: ON)
Max. speed : 92 000 cph^{*1} (IPC9850(1608): 66 200 cph^{*1}) / Placement accuracy : $\pm 37 \mu\text{m}$
- ◆ **High accuracy mode** (High production mode: OFF)
Max. speed : 76 000 cph^{*1} / Placement accuracy : $\pm 30 \mu\text{m}$ (Option : $\pm 25 \mu\text{m}^{*2}$)


^{*1}Tact for 16NH V3 x 2 head
^{*2}Under conditions specified by Panasonic

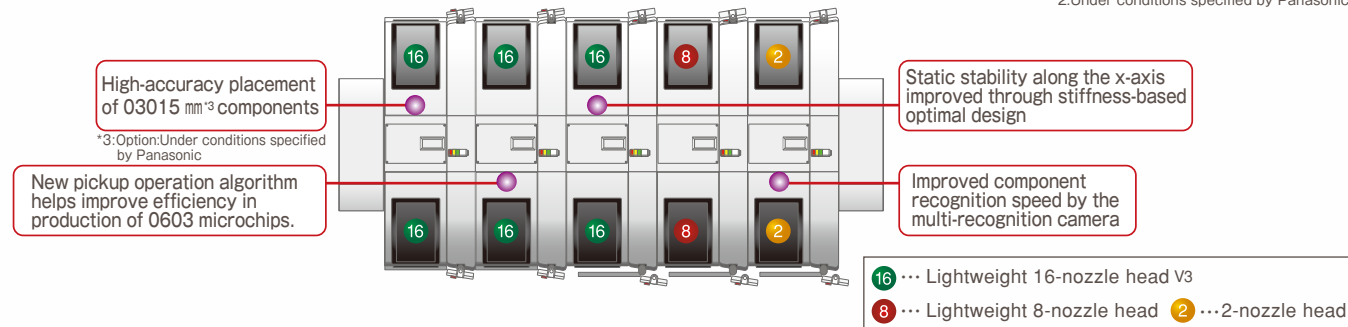

High productivity


Lightweight 16NH V3

The introduction of lightweight 16NH V3 allows the X- and Y-axes to be driven simultaneously during parts recognition, thus improving placement tact through optimal routing.

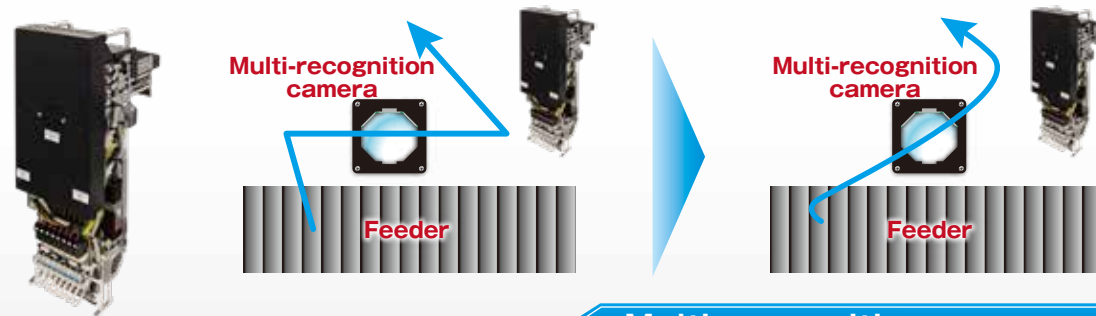

Multi-recognition camera

The three distinct recognition capabilities conventionally included in separate units have been integrated into one device. Now the three different recognition operations, including the one to detect the parts condition along their heights, can be simultaneously performed in a single scan, thus delivering continued high productivity. The device can be upgraded from 2D specs to 3D specs.

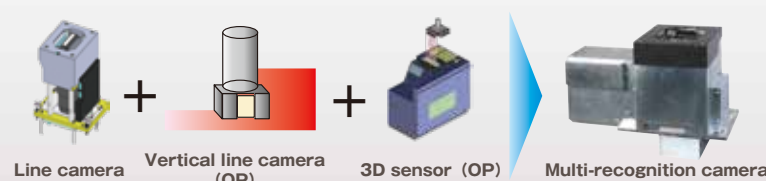


Dual mounting method

Alternate, Independent & Hybrid Placement


Selectable "Alternate" and "Independent" dual placement method allows you to make good use of each advantage.

- **Alternate**: Front and rear heads execute placement on PCBs in front and rear lanes alternately.
- **Independent**: Front head executes placement on PCB in front lane and rear head execute placement on rear lane.

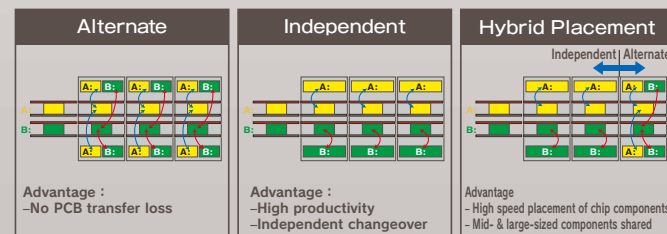

High productivity through fully independent placement

Achieved independent placement of tray components by directly linking with NPM-TT2. Capable of fully independent placement of tray components improving cycle time of mid-, large-size component placement with 3-nozzle head. Output of entire line is enhanced.

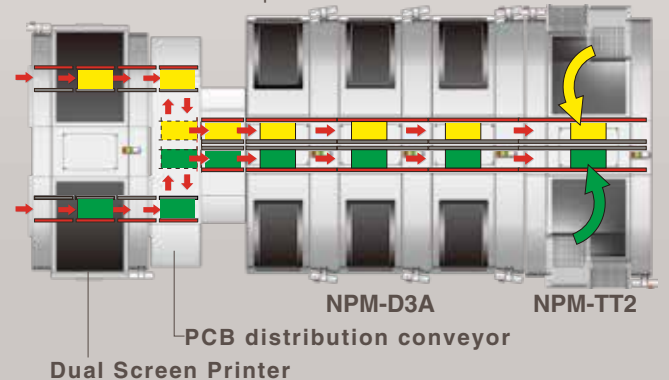


Improved availability

Automatic recovery option


This automatically adjusts the pickup position without interrupting the machine to continue production, thus enhancing machine availability.

[Automatically resume production after pickup position teach]

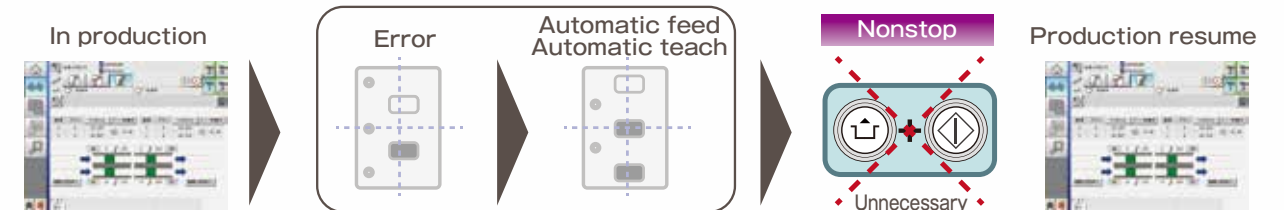


Remote operation option

Recovery by remote operation is available for the error of which recovery can be made based on human judgment alone. This enables concentrated on-the-floor monitoring, eliminating the time lost for the operator to detect error and take appropriate action, reducing the error recovery time, and thus achieving labor saving and improved operating rate.

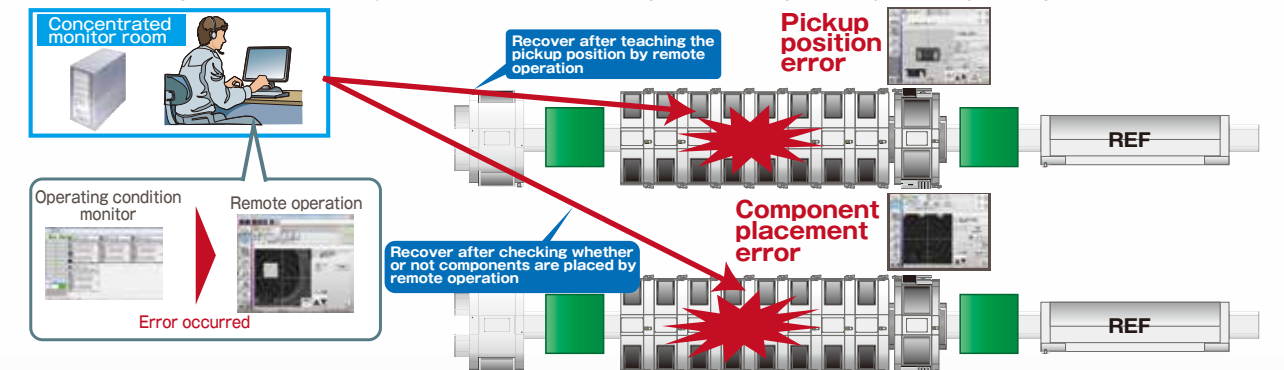


AOI Info Display Option

Information on components judged NG by AOI is displayed both on AOI and NPM.

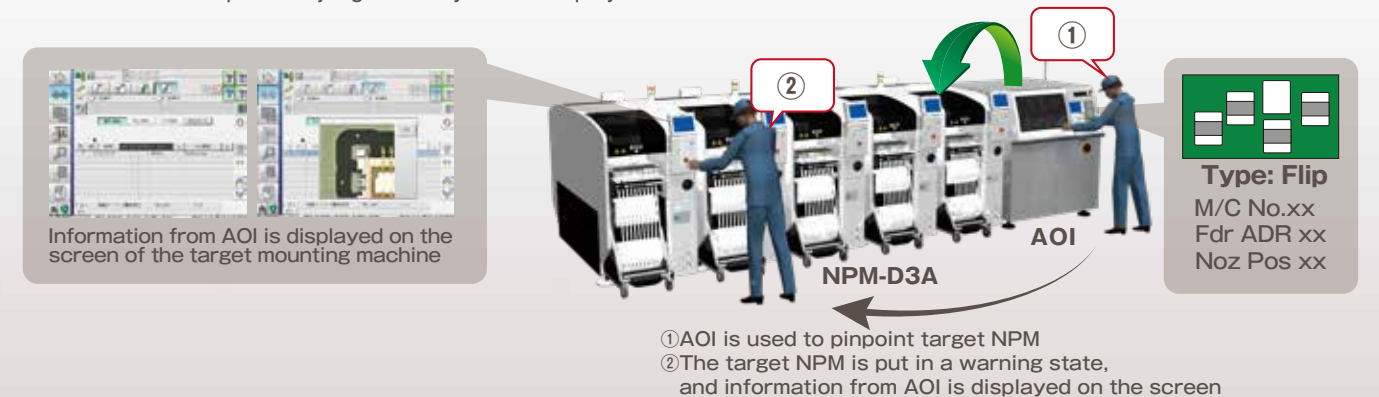

High-quality mounting

APC system

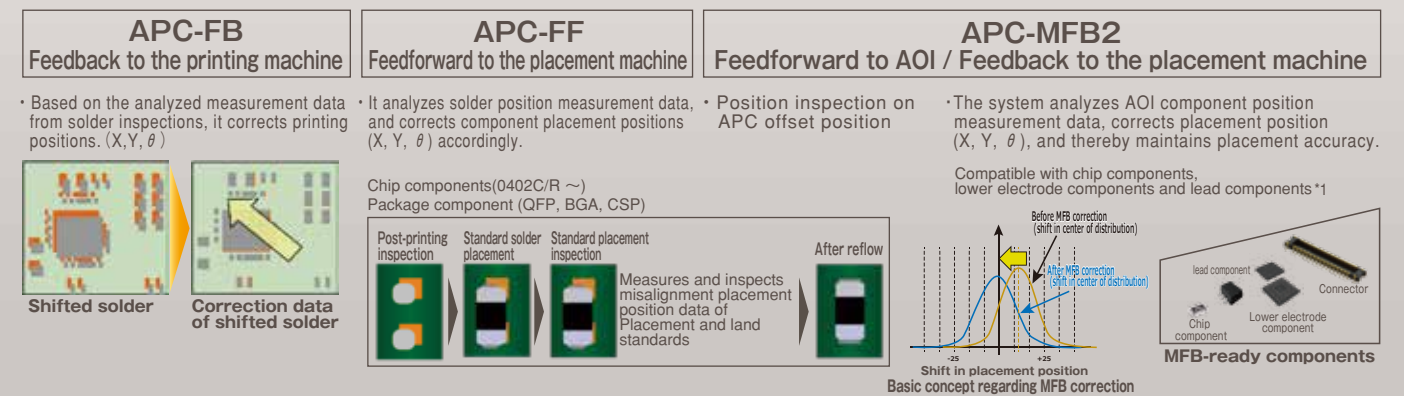


^{*1}APC-MFB2 (mounter feedback2): Applicable component types vary from one AOI vendor to another. (Please ask your local sales representative for details.)

Maintenance/Preservation


Cloud-based contractual service. It makes malfunction analysis based on machine info uploaded by subscriber to our cloud to find any feeder or nozzle*2 that requires condition check, and then sends a maintenance check suggestion list containing the analysis result to the subscriber.

*1: Maintenance service agreement must be concluded with us.
(for details, contact our sales representative.)
*2: Only Panasonic nozzles with 2D code are applicable.

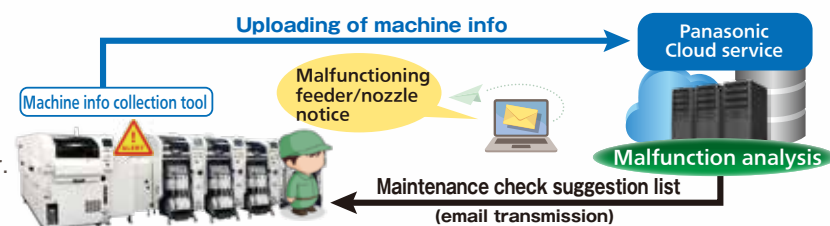

Head diagnosis option

It automatically self-diagnoses placement heads on a regular basis and stores diagnosis histories. Keeping track of any change in the condition of each head, it performs preventive maintenance of the head, reducing losses resulting from heads and sudden machine shutdowns.

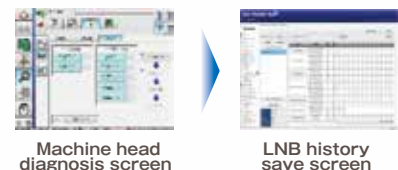

Off-line setup support station

With the support stations, offline feeder cart setup is possible even outside of the manufacturing floor.

●Two types of Support Stations are available.

- ①Component verification station
 - Batch Exchange Cart Setup: Provides power to all feeders in cart.
 - Feeder setup: Provides power to individual feeders.
 - Component verification: Navigator that indicates any location where feeders need exchange.
- ②Power supply station
 - The simpler type of station composed of the batch exchange cart setup and the feeder setup features.

Misplacement prevention

Component Verification option

Prevents setup errors during changeover Provides an increase of production efficiency through easy operation




*Wireless scanners and other accessories to be provided by customer

- Preemptively deters component misplacement
Prevents misplacement by verifying production data with the barcode information on changeover components.
- Automatic setup data synching function
The machine itself does the verification, eliminating the need to select separate setup data.
- Interlock function
Any problems or lapses in verification will stop the machine.
- Navigation function
A navigation function to make the verification process more readily understandable.

LCR checker option


At the start of production or during component supply, it checks mounted component values, thereby preventing misplacement. It contributes to improving machine availability through a reduction in time spent on component checks, as well as manufacturing conforming items.



- Misplacement prevention function
This prevents any misplacement due to components loaded on wrong feeders, defective components, or mislabeled reels. Since the relevant unit inside the machine automatically checks the conditions of components, the operator can reduce time spent on component checks.
- Interlock function
If any checked value exceeds the maximum permissible retry count, this brings the machine to a stop.
- Trace management function
As checked value data is retained in LNB (FA PC), it can be made available for inspection later. Additionally, it is possible to output such data as a file. Thus, it can also be used to keep track of any changes or histories of mounted components.


Changeover ability

Supporting changeover (production data and rail width adjustment) can minimize time loss

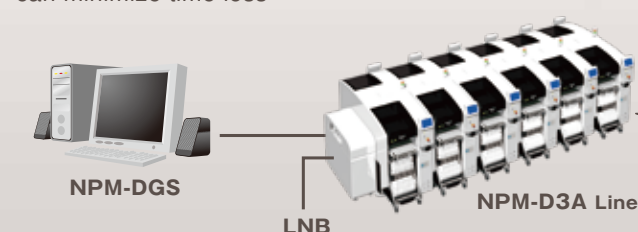


Automatic changeover option

- PCB ID read-in type
PCB ID read-in function is selectable from among 3 types of external scanner, head camera or planning form

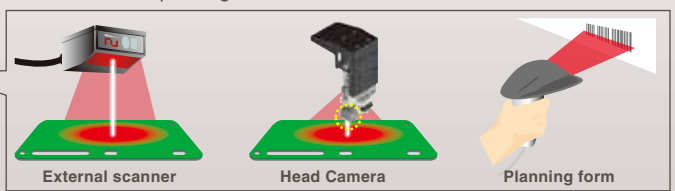

Feeder setup navigator option


It is a support tool to navigate efficient setup procedure. The tool factors in the amount of time it takes to perform and complete setup operations when estimating the time required for production and providing the operator with setup instructions. This will visualize and streamline setup operations during setup for a production line.

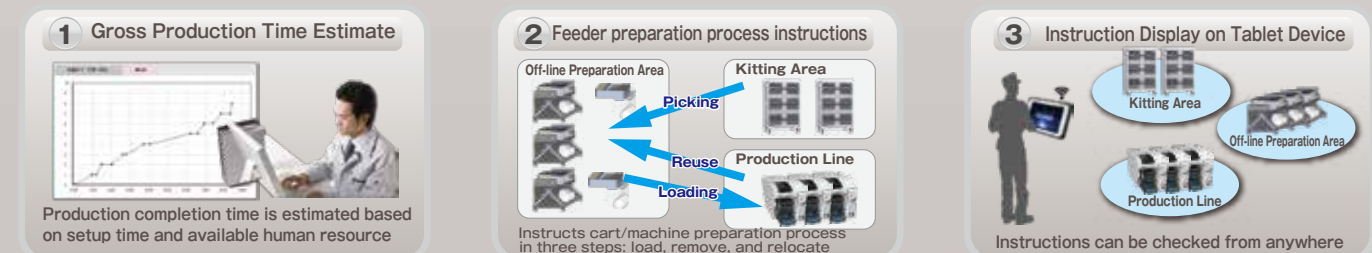

Operating rate improvement

Parts supply navigator option

A component supply support tool that navigates efficient component supply priorities. It considers the time left until component run-out and efficient path of operator movement to send component supply instructions to each operator. This achieves more efficient component supply.

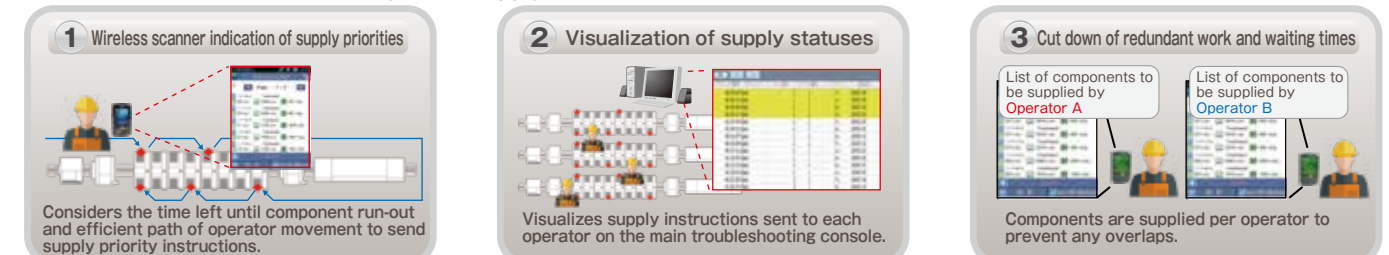


*PanaCIM is required to have operators in charge of supplying components to multiple production lines.

PCB info communication function

Information of mark recognitions done on first NPM machine in line is passed on to downstream NPM machines. Which can reduce cycle time utilizing the transferred information.

[Subject for communication]

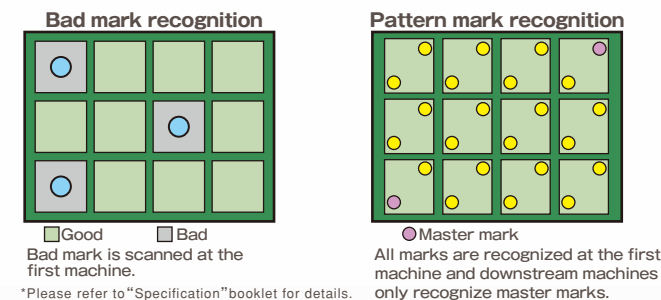


*Please refer to "Specification" booklet for details.

Data Creation System

NPM-DGS (Model No.NM-EJS9A)

This is a software package that provides integrated management of component library CAD import and PCB data, as well as production data that maximizes mounting lines with high-performance and optimization algorithms.

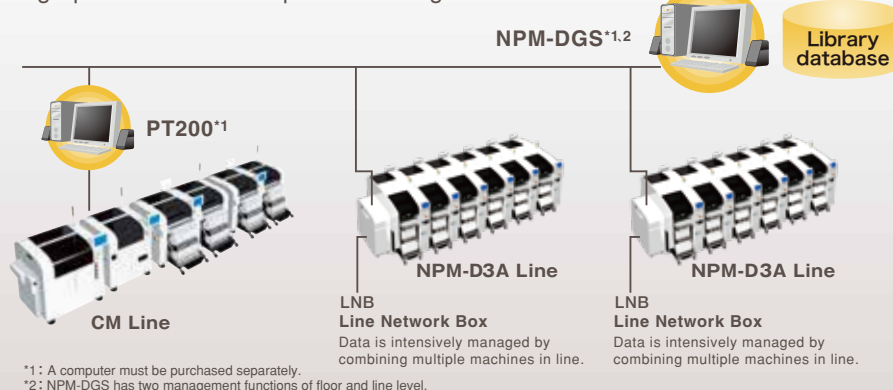

*1: A computer must be purchased separately.
*2: NPM-DGS has two management functions of floor and line level.

Optimization



Allows you to import CAD data and check polarity, etc., on the screen.

Realizes high productivity and also allows you to create common arrays.



Update production data on PC during production to reduce the loss of time.

Allows unified management of the component library including mounting, inspection and dispensing.

Offline Camera(option)

Component data can be created offline even while the machine is in operation. Use the line camera to create component data. Lighting conditions and recognition speed can be confirmed in advance, so it contributes to the improvement of productivity and quality.



DGS Automation(option)

Automated manual routine tasks reduce operation errors and data creation time. Manual routine tasks can be automated. By collaborating with the customer system, the routine tasks for creating data can be reduced, so it contributes to a significant reduction in production preparation time. It also includes the function to automatically correct the coordinates and angle of the mounting point (Virtual AOI).



Optimization of setup(option)

In production involving multiple models, setup workloads are taken into account and optimized. For more than one PCB sharing common component placement, multiple setups may be required due to a shortage of supply units. In order to reduce the required setup workloads in such a case, this option divides PCBs into similar component placement groups, selects a table(s) for setup and thus automates component placement operation. It contributes to improving setup performance and reducing production preparation time for customer manufacturing various kinds of products in small quantities.

